




The "invisible" expansion joint. It is considered as such due to its 5 mm top width which makes it look as if were part of the grouting joint. The harder plastic flange guarantees an excellent hold under the tile and will follow its movements in compression and expansion. Suitable for internal and external use and virtually maintenance free.

The soft plastic is resistant to most relevant chemicals encountered in tile applications, to weathering, ageing and UV rays. Designed to divide big tiled areas in smaller bays. It will remain flexible and resistant to attacks of fungus and bacteria. The CAJ model offers a rather limited tile edge protection.


coflex™ CAJ

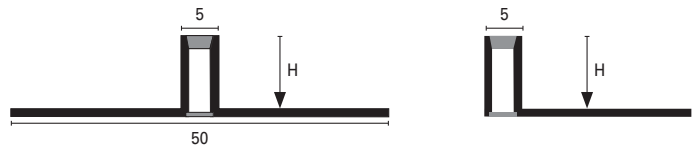

Illustrated scale dimension 1:1
(CAJ 100*)

INSTALLATION:

- Select a joint with the height matching exactly the tile thickness (the joint must not rise above the level of covering surface but should be laid 0,5 ÷ 1 mm below the edge of the tiles).
- Trowel adhesive as normal.
- Align the joint over the screed joint (if not existent, cut the screed for at least 2/3 of its thickness).
- Lay tiles alongside the flanges so that they are solidly embedded and flush with the profile.
- The joint between the tile and the profile to be filled completely with grout.

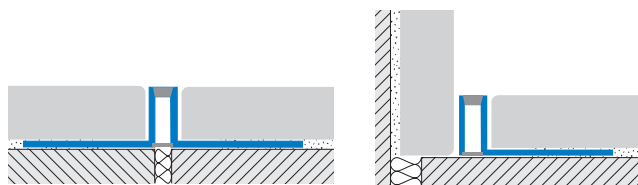

COFLEX CAJ-P* Co-Extruded synthetic resin

Synthetic material profile joint with technical characteristics which offer high elasticity, durability and tolerance to common corrosion. Supplied in different colours to combine with main grout colours and different covering materials. Applicable for both indoor and outdoor coverings.



	H=mm		Art.	
Material:	4,5	CAJ	45	P11/P23/P32/P51
Resinflex + Resinil	6	CAJ	60	P11/P23/P32/P51
Colour*: Pure white (P11), Cement grey (P23), Dark beige (P32), Black (P51)	8	CAJ	80	P11/P23/P32/P51
	10	CAJ	100	P11/P23/P32/P51
	12,5	CAJ	125	P11/P23/P32/P51
Length: 2,70 metres				
☒ "ultra-thin" line				

COFLEX CAJP-P23 Perimeter joint in synthetic resin

Profile for finishing floor coverings such as ceramics around the perimeter of a room or next to windows, door frames and thresholds.



	H=mm		Art.	
Material:	4,5	CAJP	45	P23
Resinflex + Resinil	6	CAJP	60	P23
Colour: Cement grey (P23)	8	CAJP	80	P23
	10	CAJP	100	P23
	12,5	CAJP	125	P23
Length: 2,70 metres				
☒ "ultra-thin" line				