




stairtec™ FO

STAIRTEC FO is a technical yet elegant stair edging profile suitable for ceramic or wood laying coverings. It is made of solid brass, easy to apply. It is a valid substitute for the "special piece" ceramic nosing which is far more expensive and more subject to breakage. The **STAIRTEC FO** enhances the step edge's elegance with most types of tiles and its top grooved surface gives the stair the sufficient safety feature. This profile is suitable for both domestic and commercial environments. Vertical dovetail anchorage. Patented system.

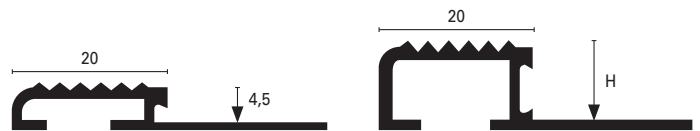

Illustrated scale dimension 1:1
(FO 45* - FO 100*)


Note: Stainless steel version has a slightly different section



FOTA IS



FOTI IS

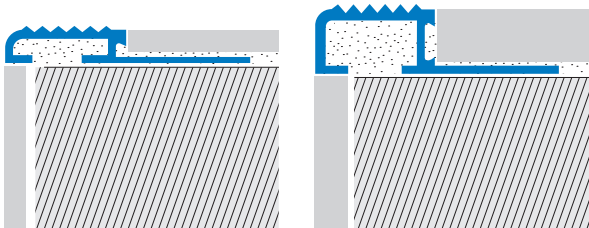

STAIRTEC FO-AS Silver Extruded Anodised Aluminium

This profile has an approx. 20 micron silver coating and is suitable for both indoor or outdoor application with high tolerance to weather agents but less to mechanical impact. During installation excess adhesive and grout should be removed immediately to avoid stains. The exposed surface may change colour or darken in time. Where higher stresses are involved the use of brass profiles is recommended.

Available brushed stainless steel (IS) end caps (FOTA), in all measures.

STAIRTEC FO-O* Extruded Brass

Thanks to the natural properties of brass, it ensures a high tolerance to mechanical impact and in areas subject to chemical presence. It still contributes to maintain an elegant finish to the coverings applied. Through contact with moisture or chemicals brass may oxidize on the exposed surface but the problem is easy to solve by just buffing the profile with a conventional polishing product. Available in natural brass (ON) or polished brass (OL).

STAIRTEC FO-IL* Stainless Steel

Stainless steel profile. Suitable for indoor and outdoor applications. Excellent resistance to corrosion, so it is ideal in the food, chemical and hospital areas and public toilets.

Available brushed stainless steel (IS) end caps (FOTI), in all measures.

| | H=mm | | Art. | |
|---|-------|----|------|----|
| Material: | 4,5* | FO | 45 | AS |
| Extruded anodised aluminium | 8* | FO | 80 | AS |
| Finish: Silver (AS) | 10* | FO | 100 | AS |
| | 12,5* | FO | 125 | AS |
| Length: 2,70 metres | | | | |
| Improved anchoring on the vertical side | | | | |
| End caps: FOTA* IS | | | | |
| "ultra-thin" line | | | | |

| | | | | |
|-------------------------------------|------|----|-----|-------|
| Material: | 10 | FO | 100 | ON/OL |
| Extruded Brass | 12,5 | FO | 125 | ON/OL |
| Finish: Natural (ON), Polished (OL) | | | | |
| Length: 2,70 metres | | | | |

| | | | | |
|--------------------------|-------|----|-----|----|
| Material: | 10* | FO | 100 | IL |
| Stainless Steel AISI 304 | 12,5* | FO | 125 | IL |
| Finish: Polish (IL) | | | | |
| Length: 2,70 metres | | | | |
| End caps: FOTI* IS | | | | |